


HYDROGRAPHIC SURVEY of SHAWNEE TWIN LAKE NO. 2

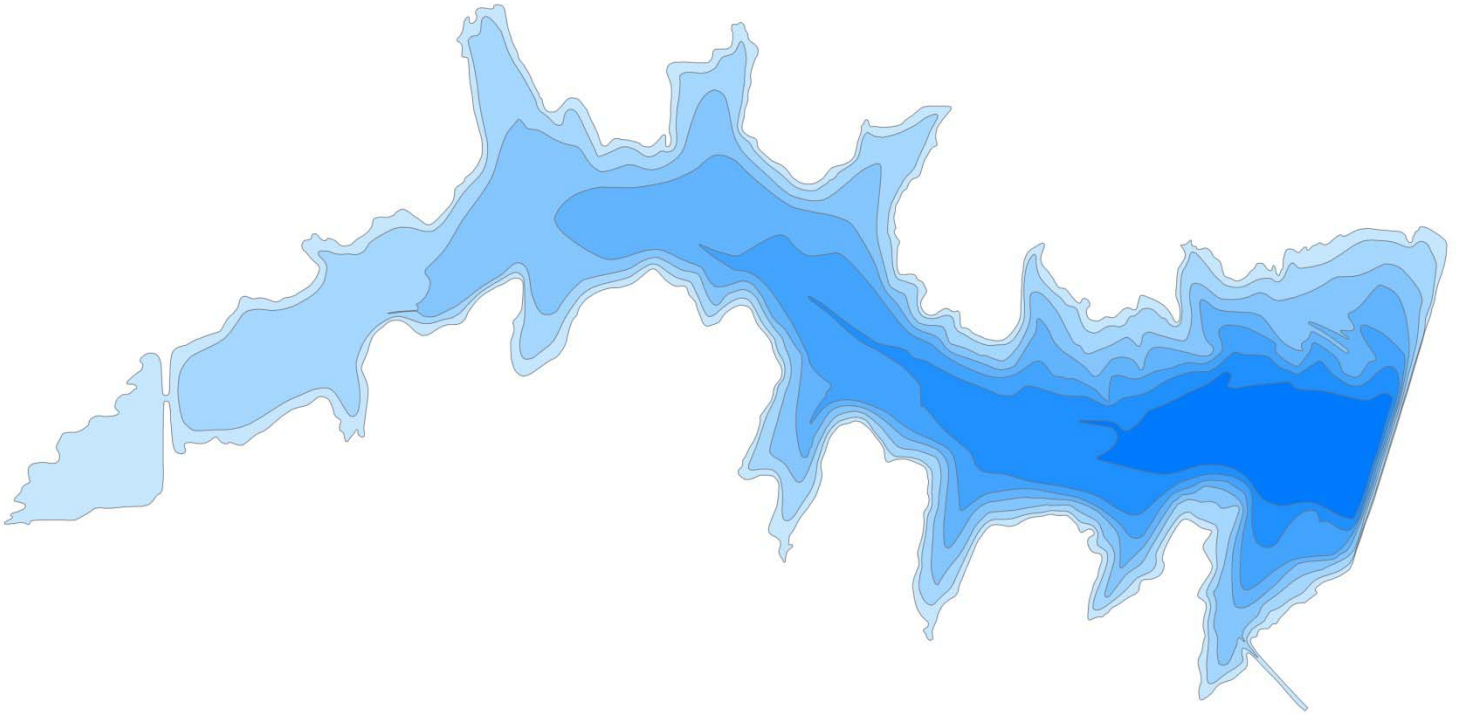

Final Report

October 31, 2011

Prepared by:



TABLE OF CONTENTS

TABLE OF CONTENTS	2
TABLE OF FIGURES	3
TABLE OF TABLES	3
INTRODUCTION	4
LAKE BACKGROUND	4
HYDROGRAPHIC SURVEYING PROCEDURES	5
Pre-survey Planning	5
Boundary File	5
Set-up	5
Field Survey	5
Lake Elevation Acquisition	5
Method	6
Technology	6
Survey	6
Quality Control/Quality Assurance	6
Data Processing	8
GIS Application	9
RESULTS	9
SUMMARY and COMPARISON	9
REFERENCES	11
APPENDIX A: Area-Capacity Data	12
APPENDIX B: Shawnee Twin Lake No. 2 Maps	17

TABLE OF FIGURES

Figure 1: Location map for Shawnee Twin Lake No. 2.....	4
Figure A. 1. Area-Capacity Curve for Shawnee Twin Lake No. 2.....	15
Figure B. 1: Shawnee Twin Lake No. 2 Bathymetric Map with 5-foot Contour Intervals.....	18
Figure B. 2: Shawnee Twin Lake No. 2 Shaded Relief Bathymetric Map.	19
Figure B. 3: Shawnee Twin Lake No. 2 Collected Data Points.....	20

TABLE OF TABLES

Table 1: Area and Volume Comparisons of Shawnee Twin Lake No. 2.....	10
Table A. 1: Shawnee Twin Lake No. 2 Capacity/Area by 0.1-ft Increments.	13
Table A. 2: Shawnee Twin Lake No. 2 Capacity/Area by 0.1-ft Increments (cont).....	14

SHAWNEE TWIN LAKE NO. 2 HYDROGRAPHIC SURVEY REPORT

INTRODUCTION

The Oklahoma Water Resources Board (OWRB) conducted a hydrographic survey of Shawnee Twin Lake No. 2 beginning in July of 2011. The purpose of this survey was to collect hydrographic data of the lake and convert this information into an elevation-area-capacity table. This project was funded by the OWRB's Dam Safety Program.

LAKE BACKGROUND

Shawnee Twin Lake No. 2 is located on South Deer Creek in Pottawatomie County (**Figure 1**). The dam was completed in 1960 and is located within the city limits of Shawnee, OK; approximately eight miles west of the Shawnee business district. Its purposes are water supply, and recreation.



Figure 1: Location map for Shawnee Twin Lake No. 2.

HYDROGRAPHIC SURVEYING PROCEDURES

The process of surveying a reservoir uses a combination of Geographic Positioning System (GPS) and acoustic depth sounding technologies that are incorporated into a hydrographic survey vessel. As the survey vessel travels across the lake's surface, the echosounder gathers multiple depth readings every second. The depth readings are stored on the survey vessel's on-board computer along with the positional data generated from the vessel's GPS receiver. The collected data files are downloaded daily from the computer and brought to the office for editing. During editing, data "noise" is removed or corrected, and average depths are converted to elevation readings based on the daily-recorded lake level elevation on the day the survey was performed. Accurate estimates of area-capacity can then be determined for the lake by building a 3-D model of the reservoir from the corrected data. The process of completing a hydrographic survey includes four steps: pre-survey planning, field survey, data processing, and GIS application.

Pre-survey Planning

Boundary File

The boundary file for Shawnee Twin Lake No. 2 was on-screen digitized from the 2006 color digital orthoimagery quarter quadrangle (DOQQ) mosaic of Pottawatomie County, Oklahoma. The screen scale was set to 1:1,500. A line was to represent the shoreline as closely as possible. Due to the photography being a summer photo, it was difficult to determine the actual shoreline when there are trees and other vegetation hanging over the lake. The 2008 and 2010 DOQQs of the lakes were used as back ground reference. The reservoir boundaries were digitized in NAD 1983 State Plane Coordinates (Oklahoma South-3502).

Set-up

HYPACK software from Hypack, Inc. was used to assign geodetic parameters, import background files, and create virtual track lines (transects). The geodetic parameters assigned were State Plane NAD 83 Zone OK-3502 Oklahoma South with distance units and depth as US Survey Feet. The survey transects were spaced according to the accuracy required for the project. The survey transects within the digitized reservoir boundary were at 300 ft increments and ran perpendicular to the original stream channels and tributaries. Approximately 37 virtual transects were created for Shawnee Twin Lake No. 2.

Field Survey

Lake Elevation Acquisition

The lake elevation for Shawnee Twin Lake No. 2 was obtained by collecting positional data over a period of approximately 199 minutes with a survey-grade Global Positioning System (GPS) receiver. The receiver was placed over the water's surface. A measurement was taken from the antenna to the surface of the water. The collected data and antenna height was then uploaded to the On-line Positioning Users Service (OPUS) website. The National Geodetic Survey (NGS) operates OPUS as a means to provide GPS users easier access to the National Spatial Reference System (NSRS). OPUS allows users to submit their GPS data files to NGS, where the data is processed to determine a position using NGS computers and software. Calculated coordinates are averaged from three independent single-baseline solutions computed by double-differenced, carrier-phase measurements between the collected data file

and 3 surrounding Continuously Operating Reference Stations (CORS). Under ideal conditions, OPUS can easily resolve most positions to within centimeter accuracy. A report containing the newly calculated positional data was electronically returned via email. This report contained the elevation of the surface of the water corrected for the antenna height.

Method

The procedures followed by the OWRB during the hydrographic survey adhere to U.S. Army Corps of Engineers (USACE) standards (USACE, 2002). The quality control and quality assurance procedures for equipment calibration and operation, field survey, data processing, and accuracy standards are presented in the following sections.

Technology

The Hydro-survey vessel is an 18-ft aluminum Silverstreak hull with cabin, powered by a single 115-Horsepower Mercury outboard motor. Equipment used to conduct the survey included: a ruggedized notebook computer; Innerspace 456Xpe Echo Sounder, with a depth resolution of 0.1 ft; Trimble Navigation, Inc. Pro XR GPS receiver with differential global positioning system (DGPS) correction; and an Odom Hydrographics, Inc, DIGIBAR-Pro Profiling Sound Velocimeter. The software used was HYPACK.

Survey

A two-man survey crew was used during the project. Data collection for Shawnee Twin Lake No. 2 occurred in July of 2011. The water level elevation for Shawnee Twin Lake No. 2 was 1071.2 ft Geodetic Vertical Datum (NAVD88). Data collection began at the dam and moved upstream. The survey crew followed the parallel transects created during the pre-survey planning while collecting depth soundings and positional data. Data was also collected along a path parallel to the shoreline at a distance that was determined by the depth of the water and the draft of the boat – generally, two to three feet deep. Areas with depths less than this were avoided.

Quality Control/Quality Assurance

While on board the Hydro-survey vessel, a sound velocity profile was collected each day using a DIGIBAR-Pro Profiling Sound Velocimeter, by Odom Hydrographics. The sound velocimeter measures the speed of sound at incremental depths throughout the water column. The factors that influence the speed of sound—depth, temperature, and salinity—are all taken into account. Deploying the unit involved lowering the probe, which measures the speed of sound, into the water to the calibration depth mark to allow for acclimation and calibration of the depth sensor. The unit was then gradually lowered at a controlled speed to a depth just above the lake bottom, and then was raised to the surface. The unit collected sound velocity measurements in feet/seconds (ft/sec) at 1 ft increments on both the deployment and retrieval phases. The data was then reviewed for any erroneous readings, which were then edited out of the sample. The sound velocity corrections were then applied to the to the raw depth readings.

A quality assurance cross-line check was performed on intersecting transect lines and channel track lines to assess the estimated accuracy of the survey measurements. The overall accuracy of an observed bottom elevation or depth reading is dependent on random and systematic errors that are present in the measurement process. Depth measurements contain both random

errors and systematic bias. Biases are often referred to as systematic errors and are often due to observational errors. Examples of bias include a bar check calibration error, tidal errors, or incorrect squat corrections. Bias, however, does not affect the repeatability, or precision, of results. The precision of depth readings is affected by random errors. These are errors present in the measurement system that cannot be easily reduced by further calibration. Examples of random error include uneven bottom topography, bottom vegetation, positioning error, extreme listing of survey vessel, and speed of sound variation in the water column. An assessment of the accuracy of an individual depth or bottom elevation must fully consider all the error components contained in the observations that were used to determine that measurement. Therefore, the ultimate accuracy must be estimated (thus the use of the term “estimated accuracy”) using statistical estimating measures (USACE, 2002).

The depth accuracy estimate is determined by comparing depth readings taken at the intersection of two lines and computing the difference. This is done on multiple intersections. The mean difference of all intersection points is used to calculate the mean difference (MD). The mean difference represents the bias present in the survey. The standard deviation (SD), representing the random error in the survey, is also calculated. The mean difference and the standard deviation are then used to calculate the Root Mean Square (RMS) error. The RMS error estimate is used to compare relative accuracies of estimates that differ substantially in bias and precision (USACE, 2002). According to the USACE standards, the RMS at the 95% confidence level should not exceed a tolerance of ± 2.0 ft for this type of survey. This simply means that on average, 19 of every 20 observed depths will fall within the specified accuracy tolerance.

HYPACK Cross Statistics program was used to assess vertical accuracy and confidence measures of acoustically recorded depths. The program computes the sounding difference between intersecting lines of single beam data. The program provides a report that shows the standard deviation and mean difference. A total of 118 cross-sections points at Shawnee Twin Lake No. 2 were used to compute error estimates. A mean difference (arithmetic mean) of 0.025 ft and a standard deviation of 0.162 ft were computed from intersections. The following formulas were used to determine the depth accuracy at the 95% confidence level.

$$RMS = \sqrt{\sigma^2_{Random\ error} + \sigma^2_{Bias}}$$

where:

Random error = Standard deviation

Bias = Mean difference

RMS = root mean square error (68% confidence level)

and:

$$RMS\ (95\%) \text{ depth accuracy} = 1.96 \times RMS\ (68\%)$$

An RMS of ± 0.32 ft with a 95% confidence level is less than the USACE’s minimum performance standard of ± 2.0 ft for this type of survey. A mean difference, or bias, of

0.025ft is well below the USACE's standard maximum allowable bias of ± 0.5 ft for this type of survey.

The GPS system is an advanced high performance geographic data-acquisition tool that uses DGPS to provide sub-meter positional accuracy on a second-by-second basis. Potential errors are reduced with differential GPS because additional data from a reference GPS receiver at a known position are used to correct positions obtained during the survey. Before the survey, Trimble's Pathfinder Controller software was used to configure the GPS receiver. To maximize the accuracy of the horizontal positioning, the horizontal mask setting was set to 15 degrees and the Position Dilution of Precision (PDOP) limit was set to 6. The position interval was set to 1 second and the Signal to Noise Ratio (SNR) mask was set to 4. The United States Coast Guard reference station used in the survey is located near Sallisaw, Oklahoma.

A latency test was performed to determine the fixed delay time between the GPS and single beam echo sounder. The timing delay was determined by running reciprocal survey lines over a channel bank. The raw data files were downloaded into HYPACK - LATENCY TEST program. The program varies the time delay to determine the "best fit" setting. A position latency of 0.4 seconds was produced and adjustments were applied to the raw data in the EDIT program.

Data Processing

The collected data was transferred from the field computer onto an OWRB desktop computer. After downloading the data, each raw data file was reviewed using the EDIT program within HYPACK. The EDIT program allowed the user to assign transducer offsets, latency corrections, tide corrections, display the raw data profile, and review/edit all raw depth information. Raw data files are checked for gross inaccuracies that occur during data collection.

Offset correction values of 3.2 ft. starboard, 6.6 ft. forward, and -1.1 ft. vertical were applied to all raw data along with a latency correction factor of 0.1 seconds. The speed of sound corrections were applied during editing of raw data.

A correction file was produced using the HYPACK TIDES program to account for the variance in lake elevation at the time of data collection. Within the EDIT program, the corrected depths were subtracted from the elevation reading to convert the depth in feet to an elevation.

After editing the data for errors and correcting the spatial attributes (offsets and tide corrections), a data reduction scheme was needed due to the large quantity of collected data.. To accomplish this, the corrected data was resampled spatially at a 5 ft interval using the Sounding Selection program in HYPACK. The resultant data was saved and exported out as a xyz.txt file. The HYPACK raw and corrected data files for Shawnee Twin Lake No. 2 are located on the DVD entitled *FEMA 2011 Disk 1 HYPACK/GIS Metadata*.

GIS Application

Geographic Information System (GIS) software was used to process the edited XYZ data collected from the survey. The GIS software used was ArcGIS Desktop and ArcMap, version 9.3.1, from Environmental System Research Institute (ESRI). All of the GIS datasets created are in Oklahoma State Plane South Coordinate System referenced to the North American Datum 1983. Horizontal and vertical units are in feet. The edited data points in XYZ text file format were converted into ArcMap point coverage format. The point coverage contains the X and Y horizontal coordinates and the elevation and depth values associated with each collected point.

Volumetric and area calculations were derived using a Triangulated Irregular Network (TIN) surface model. The TIN model was created in ArcMap, using the collected survey data points and the lake boundary inputs. The TIN consists of connected data points that form a network of triangles representing the bottom surface of the lake. The lake volume was calculated by slicing the TIN horizontally into planes 0.1 ft thick. The cumulative volume and area of each slice are shown in **APPENDIX A: Area-Capacity Data**.

Contours, depth ranges, and the shaded relief map were derived from a constructed digital elevation model grid. This grid was created using the ArcMap Topo to Raster Tool and had a spatial resolution of five feet. A low pass 3x3 filter was run to lightly smooth the grid to improve contour generation. The contours were created at a 5-ft interval using the ArcMap Contour Tool. The contour lines were edited to allow for polygon topology and to improve accuracy and general smoothness of the lines. The contours were then converted to a polygon coverage and attributed to show 5-ft depth ranges across the lake. The bathymetric maps of the lakes are shown with 5-ft contour intervals in **APPENDIX B: Shawnee Twin No. 2 Maps**.

All geographic datasets derived from the survey contain Federal Geographic Data Committee (FGDC) compliant metadata documentation. The metadata describes the procedures and commands used to create the datasets. The GIS metadata file for both lakes is located at on the DVD entitled *FEMA 2011 Disk 1 HYPACK/GIS Metadata*.

RESULTS

Results from the 2011 OWRB survey indicate that Shawnee Twin Lake No. 2 encompasses 642 acres and contains a cumulative capacity of 9,031 ac-ft at the normal pool elevation (1073.5 ft NAVD88). The average depth for Shawnee Twin Lake No. 2 was 14.07 ft.

SUMMARY and COMPARISON

Table 1 is a comparison of area and volume changes of Shawnee Twin Lake No. 2 at the normal pool elevation. Based on the design specifications, Shawnee Twin Lake No. 2 had an area of 710 acres and cumulative volume of 11,400 acre-feet of water at normal pool elevation (1073.5 ft NAVD88). The surface area of the lake has had a decrease of 68 acres or approximately 9.6%. The 2011 survey shows that Shawnee Twin Lake No. 2 has had an

apparent decrease in capacity of 20.8% or approximately 2,369 acre-feet. Caution should be used when directly comparing between the design specifications and the 2011 survey conducted by the OWRB because different methods were used to collect the data and extrapolate capacity and area figures. This could account for the apparent loss in capacity. It is the recommendation of the OWRB that another survey using the same method used in the 2011 survey be conducted in 10-15 years. By using the 2011 survey figures as a baseline, a future survey would allow an accurate sedimentation rate to be obtained.

Table 1: Area and Volume Comparisons of Shawnee Twin Lake No. 2 at normal pool (1073.5 ft NAVD88).

Feature	Survey Year	
	1960 Design Specifications	2011
Area (acres)	710	642
Cumulative Volume (acre-feet)	11,400	9,031
Mean depth (ft)	16.06	14.07
Maximum Depth (ft)	--	34.8

REFERENCES

U.S. Army Corps of Engineers (USACE). 2002. Engineering and Design - Hydrographic Surveying, Publication EM 1110-2-1003, 3rd version.

Oklahoma Water Resources Board (OWRB). 1978. Phase 1 Inspection Report; National Dam Safety Program.

Oklahoma Water Resources Board (OWRB). 2010. Lakes of Oklahoma.

APPENDIX A: Area-Capacity Data


Table A. 1: Shawnee Twin Lake No. 2 Capacity/Area by 0.1-ft Increments.

SHAWNEE TWIN LAKE #2 AREA-CAPACITY TABLE OKLAHOMA WATER RESOURCES BOARD 2011 Survey Capacity in acre-feet by tenth foot elevation increments Area in acres by tenth foot elevation increments											
Elevation (ft NAVD88)		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
		1038	Area	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
	Capacity	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0001	0.0014
1039	Area	0.3410	2.1220	4.0167	5.1357	6.2205	7.1831	8.0920	9.0351	10.163	11.702
	Capacity	0.0157	0.1278	0.4440	0.9026	1.4671	2.1364	2.9000	3.7556	4.7147	5.8090
1040	Area	13.068	14.036	14.822	15.476	16.129	16.832	17.584	18.385	19.233	20.189
	Capacity	7.0487	8.4075	9.8512	11.369	12.949	14.597	16.317	18.116	19.997	21.968
1041	Area	21.396	22.774	23.879	24.995	26.313	27.387	28.383	29.315	30.282	31.311
	Capacity	24.048	26.257	28.590	31.037	33.604	36.291	39.079	41.964	44.947	48.026
1042	Area	32.322	33.307	34.427	35.677	36.832	37.780	38.792	39.836	41.063	42.949
	Capacity	51.207	54.489	57.875	61.384	65.013	68.744	72.572	76.503	80.549	84.750
1043	Area	44.411	45.528	46.632	47.766	48.880	50.445	51.421	52.382	53.403	54.475
	Capacity	89.127	93.623	98.232	102.96	107.79	112.73	117.83	123.01	128.31	133.70
1044	Area	55.539	56.560	57.547	58.512	59.534	60.604	61.689	62.920	64.964	66.611
	Capacity	139.20	144.81	150.51	156.32	162.22	168.23	174.34	180.57	186.96	193.55
1045	Area	67.891	69.142	70.377	71.588	72.772	74.091	75.334	76.401	77.436	78.446
	Capacity	200.28	207.13	214.10	221.21	228.43	235.76	243.23	250.82	258.52	266.31
1046	Area	79.442	80.437	81.439	82.450	83.473	84.499	85.565	86.656	87.692	88.715
	Capacity	274.21	282.20	290.29	298.50	306.79	315.19	323.69	332.30	341.03	349.85
1047	Area	89.729	90.742	91.760	92.801	93.848	95.685	97.351	98.844	100.12	101.34
	Capacity	358.77	367.79	376.92	386.16	395.49	404.93	414.58	424.39	434.35	444.42
1048	Area	102.61	103.85	105.07	106.27	107.48	108.90	110.39	111.71	112.96	114.22
	Capacity	454.62	464.94	475.39	485.97	496.65	507.47	518.43	529.54	540.78	552.14
1049	Area	115.65	117.06	118.40	119.71	121.00	122.25	123.45	124.67	125.88	127.12
	Capacity	563.63	575.27	587.04	598.96	610.99	623.15	635.44	647.84	660.38	673.03
1050	Area	128.40	129.67	130.92	132.14	133.35	134.56	135.82	137.06	138.30	139.55
	Capacity	685.81	698.71	711.74	724.90	738.18	751.57	765.09	778.73	792.51	806.40
1051	Area	140.80	142.06	143.37	144.75	146.19	149.96	151.65	153.17	154.70	156.25
	Capacity	820.42	834.56	848.83	863.25	877.80	892.50	907.58	922.82	938.23	953.77
1052	Area	157.83	159.48	161.05	162.56	164.04	165.49	166.93	168.41	169.85	171.26
	Capacity	969.48	985.34	1001.4	1017.6	1033.9	1050.4	1067.0	1083.8	1100.7	1117.7
1053	Area	172.71	174.15	175.65	177.18	178.74	181.08	182.45	183.75	185.06	186.38
	Capacity	1134.9	1152.3	1169.8	1187.4	1205.2	1223.2	1241.3	1259.7	1278.1	1296.7
1054	Area	187.70	188.98	190.24	191.51	192.78	194.06	195.33	196.59	197.86	199.33
	Capacity	1315.4	1334.2	1353.2	1372.3	1391.5	1410.8	1430.3	1449.9	1469.6	1489.5
1055	Area	200.82	202.37	203.96	205.51	207.09	208.66	210.18	211.70	213.20	214.71
	Capacity	1509.5	1529.7	1550.0	1570.5	1591.1	1611.9	1632.8	1653.9	1675.2	1696.6
1056	Area	216.28	218.00	219.94	221.84	223.79	225.60	227.39	229.20	230.99	232.82
	Capacity	1718.1	1739.8	1761.7	1783.8	1806.1	1828.6	1851.2	1874.1	1897.1	1920.3
1057	Area	234.61	236.44	238.30	240.18	242.01	243.85	245.71	247.65	249.79	251.96
	Capacity	1943.7	1967.2	1990.9	2014.9	2039.0	2063.3	2087.8	2112.4	2137.3	2162.4
1058	Area	254.09	256.19	258.34	260.59	262.98	268.05	270.05	272.04	274.00	275.94
	Capacity	2187.7	2213.2	2238.9	2264.9	2291.1	2317.5	2344.4	2371.5	2398.9	2426.4

Table A. 2: Shawnee Twin Lake No. 2 Capacity/Area by 0.1-ft Increments (cont).

SHAWNEE TWIN LAKE #2 AREA-CAPACITY TABLE OKLAHOMA WATER RESOURCES BOARD 2011 Survey Capacity in acre-feet by tenth foot elevation increments Area in acres by tenth foot elevation increments											
Elevation (ft NAVD88)		0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
		1059	Area	277.86	279.79	281.79	283.81	285.86	287.97	290.26	292.55
	Capacity	2454.0	2481.9	2510.0	2538.3	2566.8	2595.5	2624.4	2653.5	2682.9	2712.5
1060	Area	299.54	301.63	303.60	305.64	307.75	310.19	312.54	314.83	317.15	319.49
	Capacity	2742.4	2772.4	2802.7	2833.2	2863.9	2894.7	2925.9	2957.2	2988.9	3020.7
1061	Area	321.81	324.03	326.18	328.31	330.50	332.66	334.71	336.83	338.84	340.80
	Capacity	3052.8	3085.1	3117.6	3150.3	3183.3	3216.4	3249.8	3283.3	3317.2	3351.1
1062	Area	342.77	344.75	346.80	348.93	351.11	353.34	355.69	358.13	360.64	363.19
	Capacity	3385.3	3419.7	3454.3	3489.1	3524.1	3559.3	3594.8	3630.4	3666.4	3702.6
1063	Area	365.75	368.38	371.10	373.84	376.75	381.67	383.99	386.15	388.35	390.59
	Capacity	3739.0	3775.8	3812.7	3850.0	3887.5	3925.4	3963.6	4002.2	4040.9	4079.9
1064	Area	392.78	395.00	397.27	399.57	401.92	404.36	406.86	409.45	412.06	414.64
	Capacity	4119.0	4158.4	4198.0	4237.9	4278.0	4318.3	4358.8	4399.6	4440.8	4482.1
1065	Area	417.28	420.11	423.26	426.89	430.20	433.56	436.88	440.39	443.54	446.73
	Capacity	4523.7	4565.6	4607.7	4650.3	4693.1	4736.3	4779.8	4823.7	4867.9	4912.4
1066	Area	450.03	453.54	456.64	459.41	462.11	464.92	467.74	470.46	473.15	475.88
	Capacity	4957.2	5002.4	5047.9	5093.8	5139.9	5186.2	5232.8	5279.7	5327.0	5374.4
1067	Area	478.63	481.38	484.16	487.00	489.88	492.81	495.81	498.88	502.02	505.22
	Capacity	5422.1	5470.1	5518.4	5567.0	5615.8	5665.0	5714.4	5764.1	5814.2	5864.6
1068	Area	508.50	511.85	515.27	518.76	522.33	534.87	536.26	537.65	539.05	540.45
	Capacity	5915.3	5966.3	6017.6	6069.4	6121.4	6173.8	6227.4	6281.1	6335.0	6388.9
1069	Area	541.86	543.27	544.68	546.10	547.53	548.96	550.40	551.84	553.28	554.73
	Capacity	6443.1	6497.3	6551.7	6606.3	6661.0	6715.8	6770.8	6825.9	6881.2	6936.6
1070	Area	556.19	557.65	559.11	560.59	562.06	563.54	565.03	566.52	568.02	569.52
	Capacity	6992.1	7047.8	7103.6	7159.7	7215.8	7272.1	7328.5	7385.1	7441.9	7498.7
1071	Area	571.03	572.54	574.05	575.58	577.1	578.63	580.17	581.71	583.26	584.81
	Capacity	7555.8	7612.9	7670.2	7727.8	7785.4	7843.2	7901.1	7959.2	8017.5	8075.9
1072	Area	586.37	587.93	589.50	591.07	592.65	594.23	595.82	597.41	599.01	600.61
	Capacity	8134.5	8193.2	8252.1	8311.2	8370.3	8429.7	8489.2	8548.8	8608.7	8668.7
1073	Area	602.22	603.83	605.45	607.07	608.70	642.83				
	Capacity	8728.8	8789.1	8849.6	8910.3	8971.0	9031.9				

Figure A. 1. Area-Capacity Curve for Shawnee Twin Lake No. 2

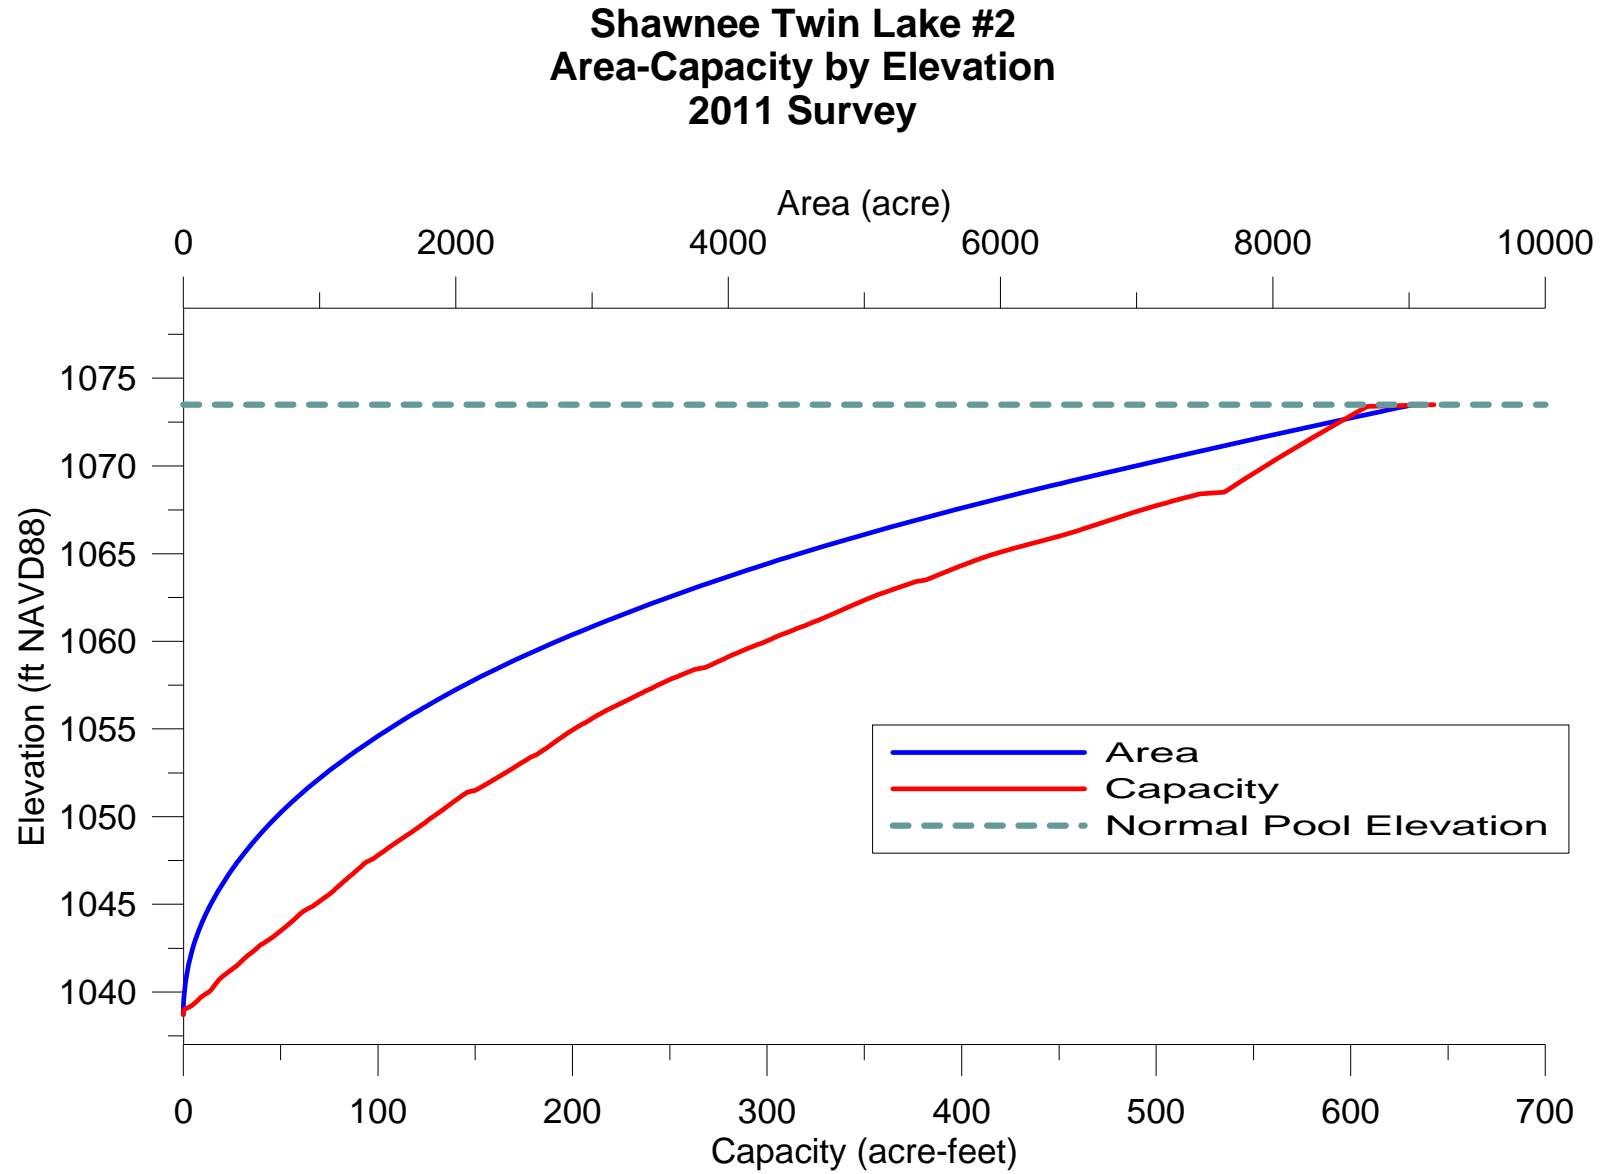

APPENDIX B: Shawnee Twin Lake No. 2 Maps

Figure B. 1: Shawnee Twin Lake No. 2 Bathymetric Map with 5-foot Contour Intervals.

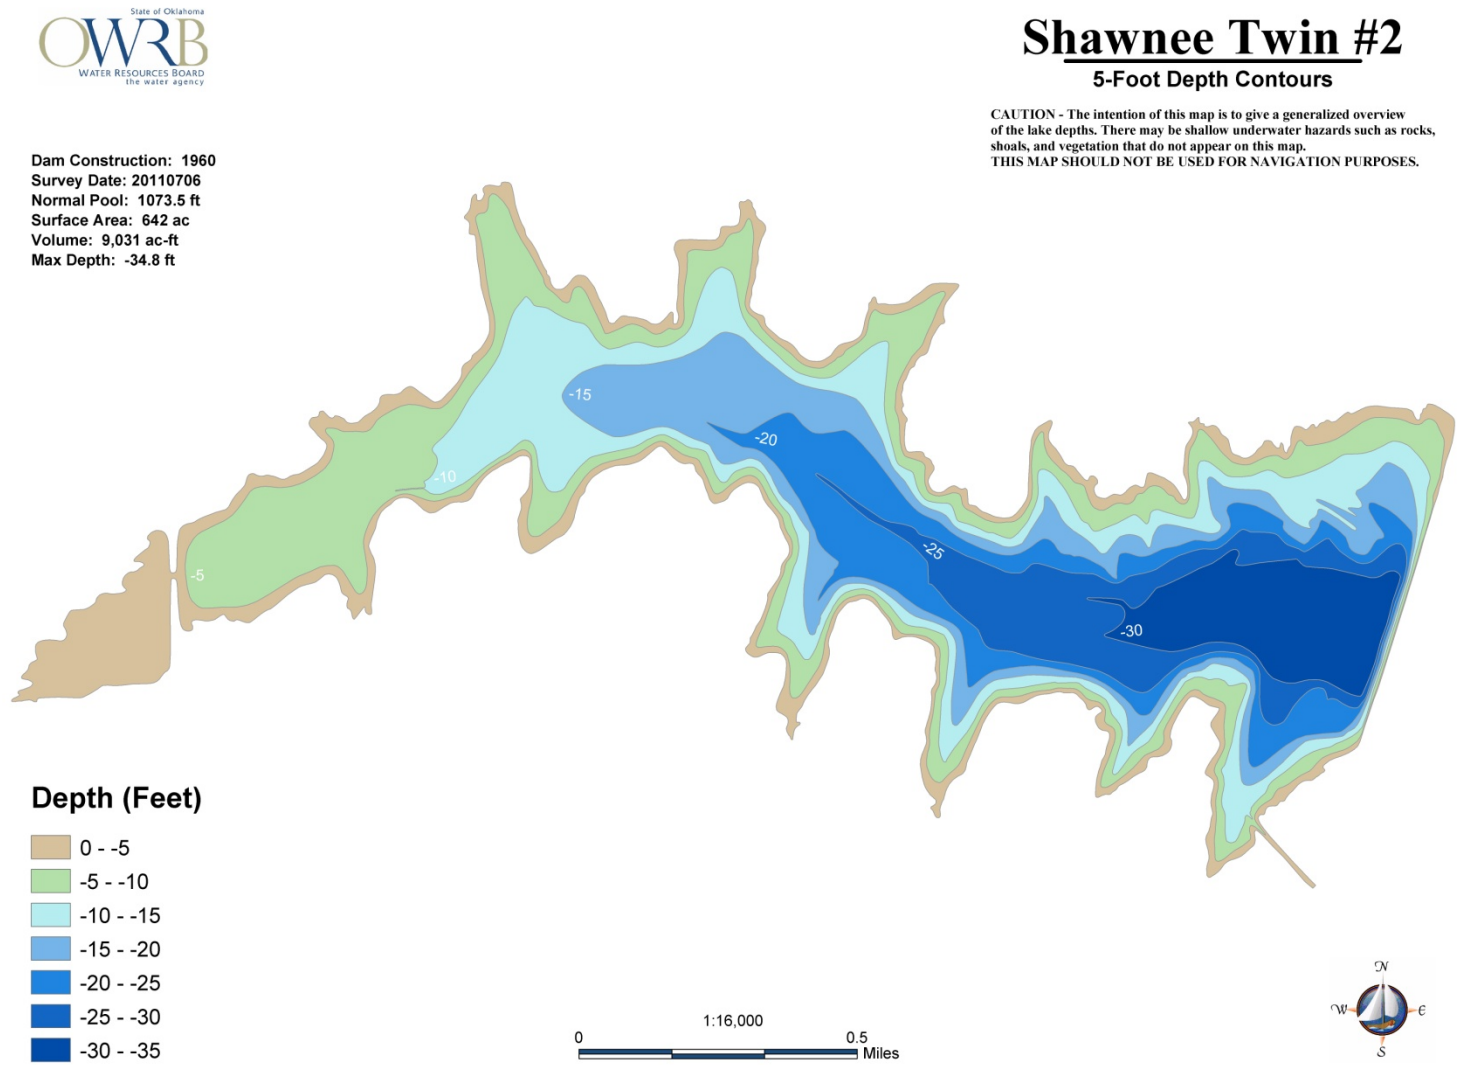


Figure B. 2: Shawnee Twin Lake No. 2 Shaded Relief Bathymetric Map.

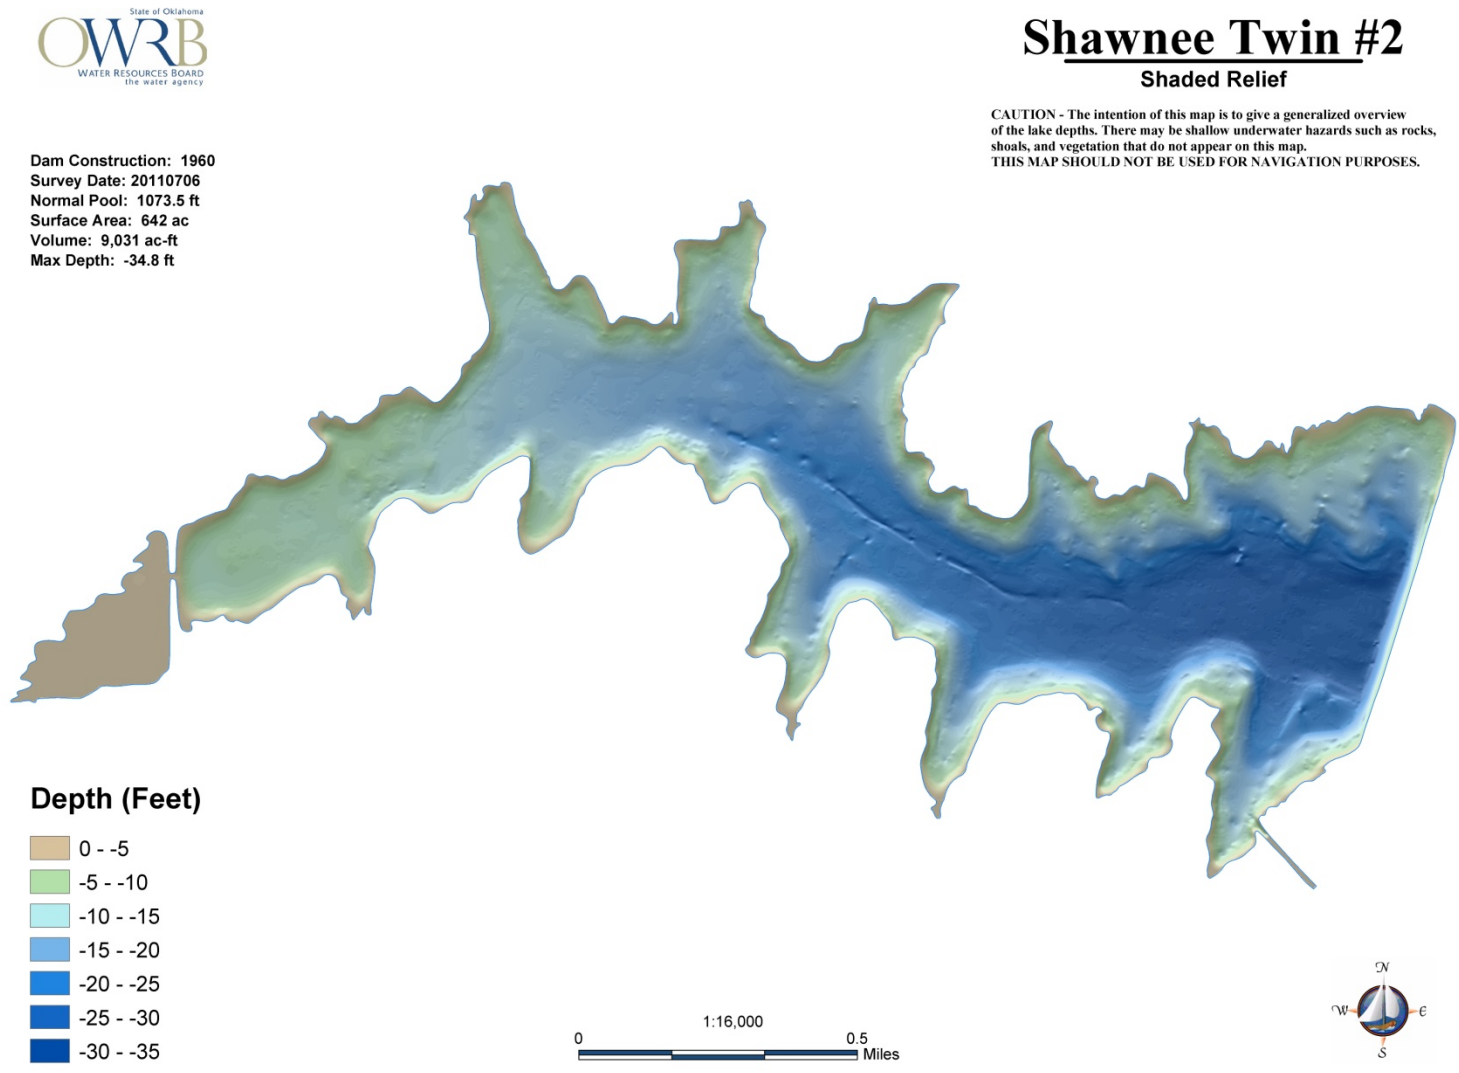



Figure B. 3: Shawnee Twin Lake No. 2 Collected Data Points.



Shawnee Twin #2

Collected Data Points

CAUTION - The intention of this map is to give a generalized overview of the lake depths. There may be shallow underwater hazards such as rocks, shoals, and vegetation that do not appear on this map. THIS MAP SHOULD NOT BE USED FOR NAVIGATION PURPOSES.

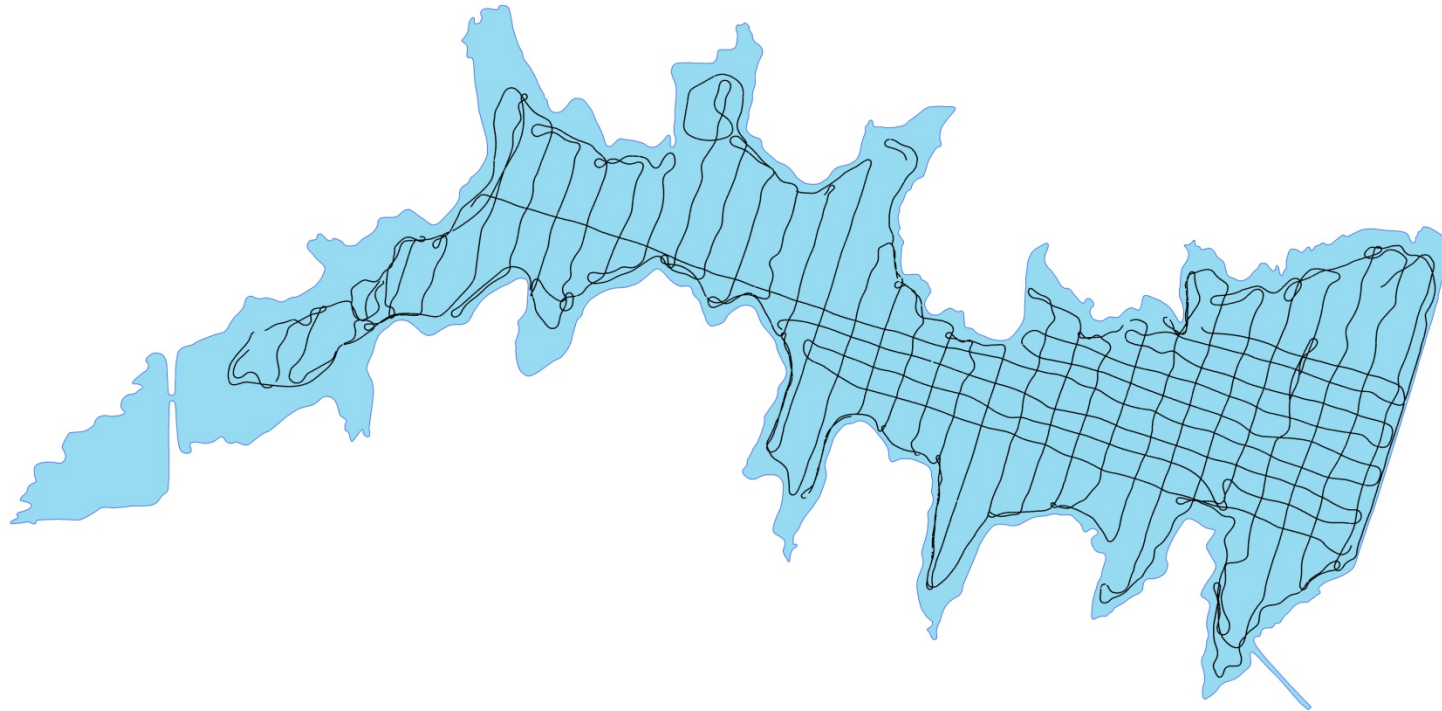

Dam Construction: 1960
Survey Date: 20110706
Normal Pool: 1073.5 ft
Surface Area: 642 ac
Volume: 9,031 ac-ft
Max Depth: -34.8 ft

